



# SUPERPRO

## Premium Grade Stainless Steel Factory-Built Chimney

*For the Chimney Professional  
Who Demands the Best.*

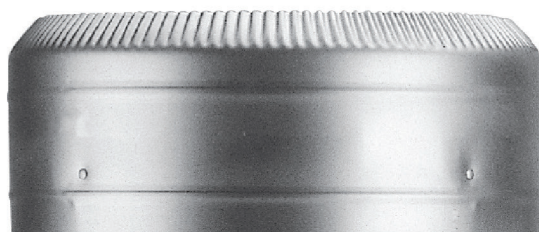

SuperPro offers the latest technology in factory-built chimney design—providing superior performance, durability and safety.

### FEATURES

- Superior Performance
- 1" of Solid Pack Insulation
- Premium Grade Stainless Steel
- Certified to UL 103 HT for All Fuel Use



# SuperPro Technical Data Sheet

## For the Chimney Professional Who Demands the Best...

SuperPro incorporates the latest technology in factory-built chimney design; providing superior performance, durability, and safety. SuperPro is designed to accompany today's appliances, which are engineered to produce low emissions and high heat. This makes SuperPro the choice of professionals who are looking for a better-quality, factory built chimney system.

## CERTIFICATION & APPLICATIONS

SuperPro is Safety Tested and Listed to applicable UL/ULC Standards.

These include:

### USA:UL 103-HT

Safety Standards for chimneys serving solid fuel and liquid fuel appliances.

This chimney system has been designed for use on wood stoves, fireplaces and residential furnaces in the U. S. market.

Allowable Flue Gas Temperatures are:

Maximum Continuous	1,000° F / 540° C
Brief Forced Firing	1400° F / 760° C (60 min.)
Creosote Burn Out	2100° F / 1150° C (3 x 10 min.)

### Canada: ULC S-604

Safety Standard for chimneys serving liquid/gas fuel appliances

This chimney system may be used on appliances that burn Oil or Gas.

SuperPro may also be used with specifically listed factory-built fireplaces, as in the MAX! Fireplaces which are listed with either 6" or 7" diameter chimney.

## Smart Choice Lifetime Warranty

The SuperPro Smart Choice Lifetime Warranty applies to all Chimney components (not just insulated lengths) making SuperPro chimney the smart choice, every time. (See written Warranty for details).

## Enhanced Features

Premium Grade Stainless Steel construction of both the inner liner and outer casing make SuperPro HT chimney extremely corrosion resistant. Embossed couplers do not allow moisture to penetrate the chimney's outer wall. Sections simply 'twist-lock' together and may be secured with optional Locking Bands. The SuperPro product line features **Deluxe Chimney Support Components** that will enhance any installation.

## Supports/Framing

All SuperPro Supports are designed to carry four times the combined weight of each system at maximum allowable height.

Support and Framing Dimensions Table				
	Ceiling Support	Wall Support	Cath. Ceiling Support	Roof Support
Support	50'	38'	38'	50'
Diameter	Framming Dimensions			
5" Dia.	12-3/8" x 12-3/8"	14-3/8" x 14-3/8"	11" x 11"	11" x 11"
6" Dia.	12-3/8" x 12-3/8"	14-3/8" x 14-3/8"	12" x 12"	12" x 12"
7" Dia.	13-3/8" x 13-3/8"	14-3/8" x 14-3/8"	13" x 13"	13" x 13"
8" Dia.	14-3/8" x 14-3/8"	14-3/8" x 14-3/8"	14" x 14"	14" x 14"

## CONSTRUCTION

Inner Liner (Flue): Premium Grade Stainless Steel  
0.016" thickness


Outer Casing: Premium Grade Stainless Steel  
0.015" thickness

Note: All SuperPro Twist-Lock Couplers are embossed (not lanced) and seams are weather-proofed to prevent moisture from entering the chimney.

Insulation: The 1" space between the inner/outer walls is Solid Packed with Mineral Wool Fibre insulation to provide superior insulating qualities, in a "slim-line" design. Solid Pack design performs favorably to Blanket type and Air-Cooled chimney designs.

**EMBOSSSED COUPLER**  
Prevents moisture  
penetration

**"SOLID PACK"  
INSULATION**  
Augured for better  
insulating value  
(than blanket insulation)  
to keep outside  
temperatures low - for  
safety and inside  
temperatures high - for  
performance

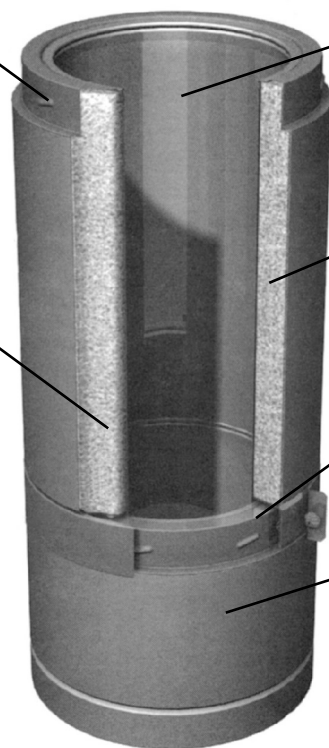

**PREMIUM GRADE STAINLESS  
STEEL INNER LINER**  
High grade material heats up  
quickly to enhance draft

**PREMIUM FIBRE  
INSULATION**  
100% Mineral Wool  
(No Chlorides)

**TWIST-LOCK  
CONNECTION**  
Easy Assembly

**PREMIUM GRADE STAINLESS  
STEEL OUTER CASING**  
Premium material prevents  
corrosion





## Smart Choice Lifetime Warranty

The SuperPro Smart Choice Lifetime Warranty applies to all Chimney components (not just insulated lengths) making SuperPro chimney the smart choice, every time. (See written Warranty for details).

# Stainless Steel Chimney Lengths

## HEIGHT REQUIREMENTS



The chimney must extend at least three feet above the highest point where it passes through the roof surface and at least two feet higher than any part of the building within a horizontal distance of ten feet.



- Slim, advanced design allows for installation between 16" centers and still provides 2" clearance from combustible material.
- Secure twist-lock design couples chimney sections together with just a 1/8 turn.
- Sectional overlap of 1-1/8".
- Chimneys are sized according to the inner diameter and are available in 5, 6, 7 and 8".

Size	Dimensions			Product Code	Pack
	A	B	C		
5" x 36"	36"	5"	7"	SPR5L36	1
5" x 24"	24"	5"	7"	SPR5L24	1
5" x 18"	18"	5"	7"	SPR5L18	1
5" x 12"	12"	5"	7"	SPR5L12	1
5" x 6"	6"	5"	7"	SPR5L6	1
6" x 48"	48"	6"	8"	SPR6L48	1
6" x 36"	36"	6"	8"	SPR6L36	1
6" x 24"	24"	6"	8"	SPR6L24	1
6" x 18"	18"	6"	8"	SPR6L18	1
6" x 12"	12"	6"	8"	SPR6L12	1
6" x 6"	6"	6"	8"	SPR6L6	1
7" x 48"	48"	7"	9"	SPR7L48	1
7" x 36"	36"	7"	9"	SPR7L36	1
7" x 24"	24"	7"	9"	SPR7L24	1
7" x 18"	18"	7"	9"	SPR7L18	1
7" x 12"	12"	7"	9"	SPR7L12	1
7" x 6"	6"	7"	9"	SPR7L6	1
8" x 48"	48"	8"	10"	SPR8L48	1
8" x 36"	36"	8"	10"	SPR8L36	1
8" x 24"	24"	8"	10"	SPR8L24	1
8" x 18"	18"	8"	10"	SPR8L18	1
8" x 12"	12"	8"	10"	SPR8L12	1
8" x 6"	6"	8"	10"	SPR8L6	1

## STAINLESS STEEL LOCKING BANDS




- Two flanges engage the grooves in each end of the adjoining sections holding them securely together.
- New design with convenient Captured Nut & Bolt.
- Locking Bands must be used:
  - on all sections that make up an offset.
  - on tee branch to attach a chimney length.
  - on any length suspended below the Cathedral or Roof Support.
- While Locking Bands are not required on other chimney lengths, their use is recommended for added safety and stability. It also provides a more attractive appearance.

Size	Dimensions		Product Code	Pack
	A	B		
5"	7"	7/16"	SPR5SLB	5
6"	8"	7/16"	SPR6SLB	5
7"	9"	7/16"	SPR7SLB	5
8"	10"	7/16"	SPR8SLB	5

# Stainless Steel Elbows & Tees

## CHIMNEY OFFSET CHARTS



This chart has three columns for elbow angle required to achieve your desired offset. The first column ("Offset") is the horizontal measurement, at the chimney center line, of the offset needed to get around an obstacle. The second column ("Height") is the height of the assembled offset elbow to the top of the return elbow. Column 3 shows the appropriate lengths required.

1. Determine the distance of the offset required.
2. On the chart, find the predetermined distance required for the elbow kit under the corresponding chimney diameter.
3. After finding the offset, follow across the chart to find the specified height and appropriate chimney lengths required under their corresponding diameters.

All measurements in inches. Offset tolerances  $\pm$  one inch.

### 15° OFFSET CHART

Offset				Height				Lengths Required					
5"	6"	7"	8"	5"	6"	7"	8"	6"	12"	18"	24"	36"	
1-1/2	1-1/8	1-1/8	1-1/4	9	10	10-1/4	10-3/4	—	—	—	—	—	
2-1/8	2-3/8	2-3/8	2-1/2	13-1/2	14-1/4	15	15-5/8	1	—	—	—	—	
4	4	4	4	19-1/8	20-1/2	20-3/4	21	—	1	—	—	—	
5-1/2	5-1/2	5-1/2	5-1/2	25	26-1/4	26-1/2	26-3/4	—	—	1	—	—	
7-1/2	7	7	7	30-1/2	32	32-1/4	32-1/2	—	—	—	1	—	
—	8-3/8	8-3/8	8-3/8	—	36-3/4	37	37-1/4	1	—	—	1	—	
10-1/8	10-1/8	10-1/4	10-1/4	42	43-5/8	44	44-1/8	—	—	—	—	1	
—	11-3/8	11-1/2	11-1/2	—	48-3/8	48-5/8	48-7/8	1	—	—	—	1	
—	13	13	13	—	54-1/8	54-3/8	54-5/8	—	1	—	—	1	
—	14-1/2	14-1/2	14-5/8	—	60	60-1/8	60-3/8	—	—	1	—	1	
—	16-1/8	16-1/8	16-1/8	—	65-3/4	66	66-1/4	—	—	—	1	1	
—	17-3/8	17-3/8	17-3/8	—	70-1/2	70-3/4	71	1	—	—	1	1	
—	19	19	19	—	76-1/4	76-1/2	76-3/4	—	1	—	1	1	

### 30° OFFSET CHART

Offset				Height				Lengths Required					
5"	6"	7"	8"	5"	6"	7"	8"	6"	12"	18"	24"	36"	
3	2-3/4	3-1/8	3-1/2	10	11-5/8	13	14-1/2	—	—	—	—	—	
5-1/4	5-1/4	5-5/8	6	14	15-7/8	17-1/4	18-3/8	1	—	—	—	—	
9	8-1/4	8-5/8	9	19-1/4	21	22-3/8	24	—	1	—	—	—	
11-1/4	11-1/4	11-5/8	12	24-1/2	26-1/4	27-5/8	29-1/8	—	1	—	—	—	
14-1/4	14-1/4	14-5/8	15	29-3/4	31-3/8	32-7/8	32-3/8	—	—	—	1	—	
—	16-5/8	17	17-1/8	—	35-5/8	37	38-1/2	1	—	—	1	—	
25-1/4	20-1/4	20-5/8	21	39-1/2	41-7/8	43-1/4	44-3/4	—	—	—	—	1	
—	22-5/8	23	23-1/2	—	46	47-1/2	49	1	—	—	—	1	
—	22-5/8	26	26-1/2	—	51-1/4	52-5/8	54-1/8	—	1	—	—	1	
—	28-5/8	29	29-1/2	—	56-3/8	57-3/8	59-3/8	—	—	1	—	1	
—	31-5/8	32	32	—	61-5/8	63	64-1/2	—	—	—	1	1	
—	34-1/8	34-1/2	35	—	65-7/8	67-1/4	68-3/4	1	—	—	1	1	
—	37-1/8	37-1/2	38	—	71	72-1/2	74	—	1	—	1	1	

## INSULATED 15° and 30° ELBOW KITS


- The Insulated Elbow is used when an offset is required.
- Locking Bands must be used on all elbows.
- A maximum of 6 feet is allowable between offsets.
- Elbow is fully insulated and can be used at the same 2" clearance as chimney lengths.
- Elbow support must be used with all offset installations.
- Elbows do not have locking ridges and can be rotated to attain optimum positioning, and allow chimney to return to correct vertical alignment, prior to installing Locking Bands.

### ELBOW KITS INCLUDE:

- 2 elbows, 4 Locking Bands &
- 1 Elbow Support




### 15° ELBOW



Size	Dimensions			Product Code	Pack
	A	B	C		
15° - 5"	3-3/8"	2-7/16"	1-15/16"	SPR5EL15K	1
15° - 6"	3-3/8"	2-1/2"	2"	SPR6EL15K	1
15° - 7"	3-3/8"	2-9/16"	2-1/16"	SPR7EL15K	1
15° - 8"	3-3/8"	2-5/8"	2-1/8"	SPR8EL15K	1


### 30° ELBOW



Size	Dimensions			Product Code	Pack
	A	B	C		
30° - 5"	2-3/4"	2-9/16"	2-9/16"	SPR5EL30K	1
30° - 6"	3-1/4"	3-1/16"	2-9/16"	SPR6EL30K	1
30° - 7"	3-3/4"	3-7/16"	2-15/16"	SPR7EL30K	1
30° - 8"	4-1/4"	3-7/8"	3-3/8"	SPR8EL30K	1

# Stainless Steel Elbows & Tees continued


## INSULATED TEE WITH PLUG

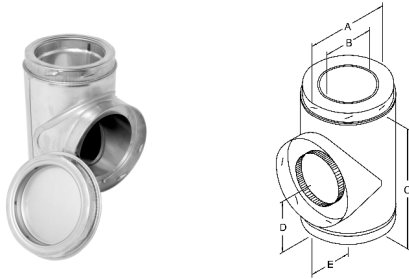

- The insulated chimney tee is used for through-the-wall installation using a wall support.
- A chimney length is attached to the tee branch using a Locking Band to pass safely through a wall.

Size	Dimensions					Product Code	Pack
	A	B	C	D	E		
5"	7"	5"	10-1/2"	5"	5"	SPR5ITP	1
6"	8"	6"	11-1/2"	5-5/8"	5-3/4"	SPR6ITP	1
7"	9"	7"	12-1/4"	6-1/4"	6-3/16"	SPR7ITP	1
8"	10"	8"	13-3/8"	6-5/8"	6-1/2"	SPR8ITP	1


## INSULATED TEE PLUG



Size	Dimensions			Product Code	Pack
	A	B	C		
5"	7"	5"	2-7/8"	J51TPI	1
6"	8"	6"	2-7/8"	J61TPI	1
7"	9"	7"	2-7/8"	J71TPI	1
8"	10"	8"	2-7/8"	J81TPI	1

## Supports


### ADJUSTABLE WALL SUPPORT

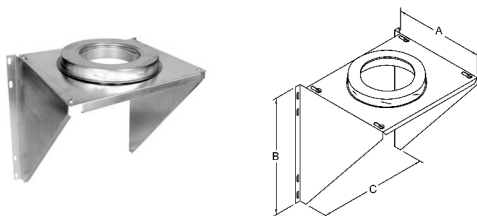

- Used to support the chimney on a through-the-wall installation.
- Will support up to 38 feet of chimney.
- Includes wall support top plate with female coupler attached, male coupler, side brackets and hardware.

Size	Dimensions			Product Code	Pack
	A	B	C		
5"	17-1/8"	10"	16"	JSC5AWS	1
6"	17-1/8"	11"	16"	JSC6AWS	1
7"	17-1/8"	12"	16"	JSC7AWS	1
8"	17-1/8"	13"	16"	JSC8AWS	1


### ADJUSTABLE INTERMEDIATE WALL SUPPORT

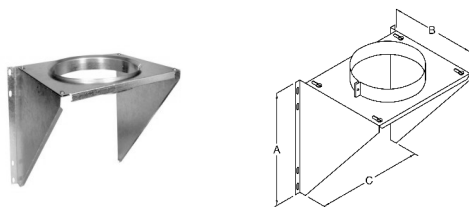

- Used as supplementary support when chimney system height exceeds maximum height allowed by Wall Support.
- Supports an additional 38 feet of chimney.
- Includes Top Plate, Support Band, Side Brackets and Hardware.

Size	Dimensions			Product Code	Pack
	A	B	C		
6"	11"	17-1/8"	16"	JSC6AIWS	1
7"	12"	17-1/8"	16"	JSC7AIWS	1
8"	13"	17-1/8"	16"	JSC8AIWS	1

### ADJUSTABLE WALL SUPPORT WITH INSULATED TEE CAP

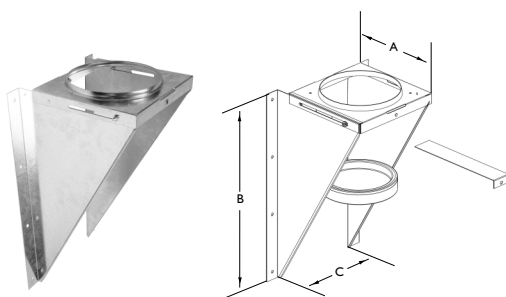


- Used to support chimney on a through-the-wall installation.
- Will support between 30 feet and 74 feet of chimney height based on size & orientation from wall
- Adjustment of 2" to 6" from a vertical wall
- Includes wall support top plate, side brackets, hardware, non-twist lock insulated tee cap, and L-bracket to contain tee cap.

Size	Dimensions			Product Code	Pack
	A	B	C		
5"	10-5/8"	18-7/8"	12"	JSC5WS	1
6"	10-5/8"	18-7/8"	12"	JSC6WS	1
7"	11-5/8"	20-1/2"	13"	JSC7WS	1
8"	12-5/8"	21-7/8"	14"	JSC8WS	1

# Supports continued


## UNIVERSAL EXTENDED WALL SUPPORT

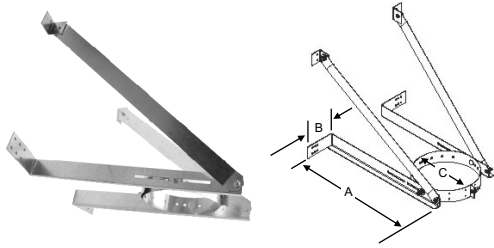

- Designed to support a vertical wall installation above the insulated tee
- Will support up to 28 feet of chimney
- Adjusts up to 12" from a vertical wall & will allow to pass by a 12" overhang

Size	Dimensions			Product Code	Pack
	A	B	C		
6" to 8"	22"	4"	8" to 10"	0800900	1


## DECORATOR CEILING SUPPORT-SPUN

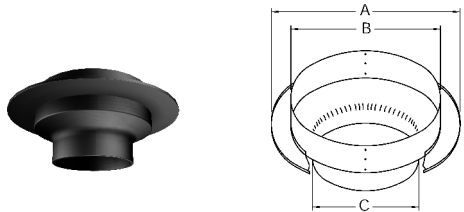

- Supports up to 50 feet of chimney.
- Matte black finish gives a finished appearance.

Size	Dimensions			Product Code	Pack
	A	B	C		
5"	17-7/8"	11-3/8"	7-1/4"	JSC5DCSS	1
6"	17-7/8"	12-3/8"	8-1/4"	JSC6DCSS	1
7"	17-7/8"	13-3/8"	9-1/4"	JSC7DCSS	1
8"	19-5/8"	14-3/8"	10-1/4"	JSC8DCSS	1


## DECORATOR CEILING SUPPORT

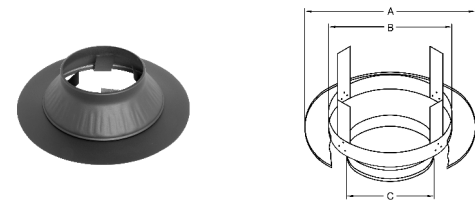

- For use in ceiling support installations
- Supports up to 50 feet of chimney
- Matte black finish gives a premium finished appearance.

Size	Dimensions			Product Code	Pack
	A	B	C		
5"	17 7/8"	11 3/8"	7 1/4"	SPR5CSB	1
6"	17 7/8"	12 3/8"	8 1/4"	SPR6CSB	1
7"	17 7/8"	13 3/8"	9 1/4"	SPR7CSB	1
8"	19 5/8"	14 3/8"	10 1/4"	SPR8CSB	1

## CATHEDRAL CEILING SUPPORT BOX

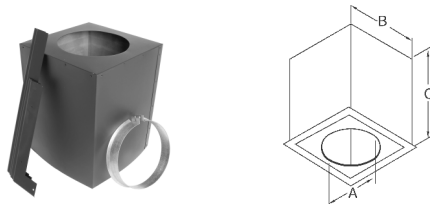


Add JUSI (pg. 10) to the Cathedral Ceiling Support Box for increased performance and safety.

- Used in pitched ceiling support installations.
- Supports up to 38 feet of chimney.
- Matte black finish.

Size	Dimensions			Product Code	Pack
	A	B	C		
5"	7-3/16"	11"	17"	SPR5CCSB	1
6"	8-3/16"	12"	17"	SPR6CCSB	1
7"	9-3/16"	13"	17"	SPR7CCSB	1
8"	10-3/16"	14"	17"	SPR8CCSB	1

## ROOF SUPPORT

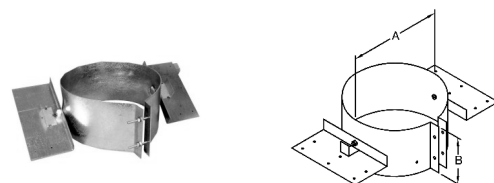


- The Roof Support may be used on a floor or roof and adjusts to any roof pitch.
- It may be used above an offset to support the offset or as a supplementary support when the chimney height exceeds that of the primary support.
- The Roof Support will support a total height of 50 feet of chimney.

Size	Dimensions		Product Code	Pack
	A	B		
5"	7"	5"	JSC5RS	1
6"	8"	5"	JSC6RS	1
7"	9"	5"	JSC7RS	1
8"	10"	5"	JSC8RS	1

# Shields

## ATTIC INSULATION SHIELD

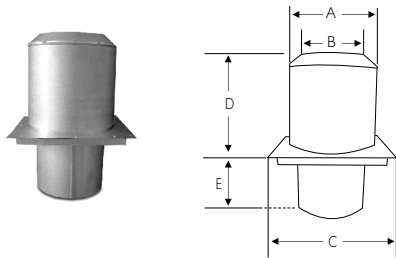


Add JUSI (pg. 10) to the Attic Insulation Shield for increased performance and safety.

- The AIS must be installed where the chimney enters the attic space in any installation.
- When fully extended the AIS provides joist shielding.
- Designed to keep insulation away from the chimney, and to maintain the mandatory 2" clearance to combustibles.
- Must be used when installing through a second floor.

Size	Dimensions					Product Code	Pack
	A	B	C	D	E		
5"	11"	7"	13"	11-13/16"	8-1/2"	JSC5AIS	1
6"	12"	8"	14"	11-13/16"	8-1/2"	JSC6AIS	1
7"	13"	9"	15"	11-13/16"	8-1/2"	JSC7AIS	1
8"	14"	10"	16"	11-13/16"	8-1/2"	JSC8AIS	1


## FIRESTOP RADIATION SHIELD

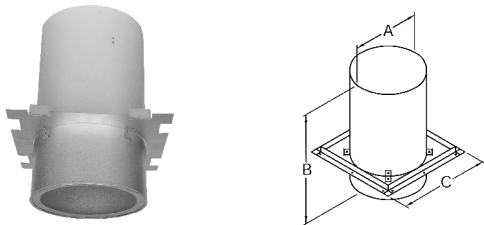

- Also known as a Firestop Joist Shield.
- Required where the chimney passes from one lower living space to another living space.
- Maintains the mandatory 2" clearance to combustibles.

Size	Dimensions			Product Code	Pack
	A	B	C		
5"	13"	9"	19"	JSC5FRS	1
6"	14"	10"	19"	JSC6FRS	1
7"	15"	11"	19"	JSC7FRS	1
8"	16"	12"	19"	JSC8FRS	1


## RAFTER RADIATION SHIELD

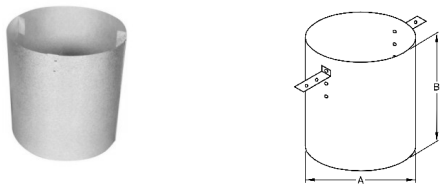

- The RRS must be installed where the chimney is enclosed immediately below the roof line

Size	Dimensions		Product Code	Pack
	A	B		
5"	9"	12"	JSC5RRS	1
6"	10"	12"	JSC6RRS	1
7"	11"	12"	JSC7RRS	1
8"	12"	12"	JSC8RRS	1

## WALL THIMBLE

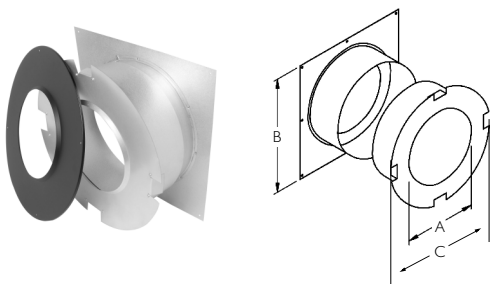


Add JUSI (pg. 10) to the Wall Thimble for increased performance and safety.

- Used in a wall support installation.
- Radiation shield is included with spacers which maintain the mandatory 2" clearance to combustibles.
- Attractive matte black finishing trim is included.
- Extends to fit 7" wall thickness.

Size	Dimensions			Product Code	Pack
	A	B	C		
5"	7-1/8"	16"	16-1/8"	SPR5WTB	1
6"	8-1/8"	16"	16-1/8"	SPR6WTB	1
7"	9-1/8"	16"	16-1/8"	SPR7WTB	1
8"	10-1/8"	16"	16-1/8"	SPR8WTB	1

# Flashings and Storm Collars


## ROOF FLASHING SELECTION CHART



In this example, the pitch is 3/12.  
0/12 - 6/12 Roof Pitch = JSC 6 or 7 AAF  
6/12 - 12/12 Roof Pitch = JSC 6 or 7 AF2

To determine what Roof Flashing you'll require, you must work out the pitch of your roof. To determine the pitch, you'll need two rulers and a level. Measure the number of inches from the end of the level down to the roof.


## ADJUSTABLE FLASHING ASSEMBLY- FLAT to 6/12

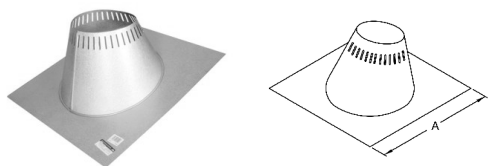

- Used where the chimney passes through a roof with a pitch of Flat to 6/12.
- Comes complete with Storm Collar.
- All seams are sealed with Silicone Sealant.
- Galvalume construction.

Size	Dimensions	Product Code	Pack
	<b>A</b>		
5"	24" x 24"	JSC5AAF-3	3
6"	24" x 24"	JSC6AAF-3	3
7"	24" x 24"	JSC7AAF-3	3
8"	27-1/2" x 27-1/2"	JSC8AAF-3	3


## ADJUSTABLE FLASHING ASSEMBLY- 6/12 to 12/12

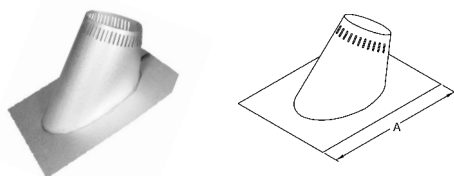

- Used where the chimney passes through a roof with a pitch of 6/12 to 12/12.
- Comes complete with Storm Collar.
- All seams are sealed with Silicone Sealant.
- Galvalume construction.

Size	Dimensions	Product Code	Pack
	<b>A</b>		
5"	30" x 21-1/2"	JSC5AF2-3	3
6"	30" x 21-1/2"	JSC6AF2-3	3
7"	30" x 21-1/2"	JSC7AF2-3	3
8"	30" x 21-1/2"	JSC8AF2-3	3


## TALL CONE FLASHING

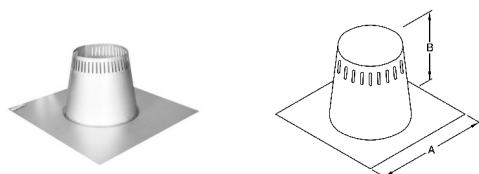

- Used on flat roof surfaces.
- All seams are sealed with Silicone Sealant.
- Comes complete with Storm Collar.

Size	Dimensions	Product Code	Pack
	<b>A</b> <b>B</b>		
5"	24" 12"	JSC5ATC	3
6"	24" 12"	JSC6ATC	3
7"	24" 12"	JSC7ATC	3
8"	24" 12"	JSC8ATC	3


## PEAK FLASHING - 3/12 to 6/12

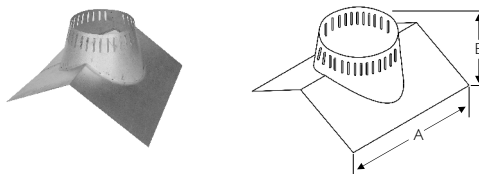

- Available in 7" only.
- Required where the chimney passes through a peaked roof with a pitch of 3/12 to 6/12.
- Comes complete with Storm Collar.

Size	Dimensions	Product Code	Pack
	<b>A</b> <b>B</b>		
7"	22" 10"	JSC7P1	1

## PEAK FLASHING - 7/12 to 9/12

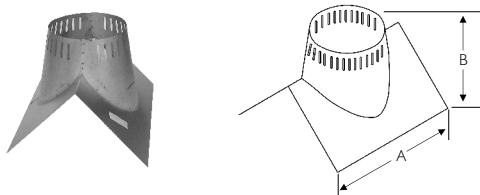

- Available in 7" only.
- Required where the chimney passes through a peaked roof with a pitch of 7/12 to 9/12.
- Comes complete with Storm Collar.

Size	Dimensions	Product Code	Pack
	<b>A</b> <b>B</b>		
7"	20" 14"	JSC7P2	1



# Flashings and Storm Collars continued

## RUBBER BOOT FLASHING KIT

### THIS KIT INCLUDES:


- Special Storm Collar
- Rubber Boot
- Spacer Kit
- Special Boot Mounting Screws



- This kit fits 5", 6", 7" and 8" Chimneys
- Required where the chimney passes through a corrugated roof.
- Rubber Boot Flashing fits roof pitches up to 12/12" (10/12 for 8").

Size	Product Code	Pack
ALL	200275	1


## ALUMINUM STORM COLLAR

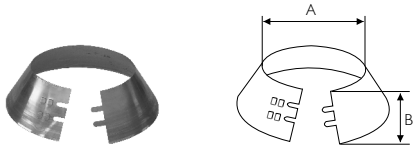

- Used in conjunction with Roof Flashing to keep precipitation out.

Size	Dimensions		Product Code	Pack
	A	B		
5"	7"	5-1/2"	JSC56SC-1	1
6"	8"	5-1/2"	JSC56SC-1	1
7"	9"	5-1/2"	JSC78SC-1	1
8"	10"	5-1/2"	JSC78SC-1	1

## SILICONE SEALANT FOR STORM COLLAR




- Used to seal Storm Collar to chimney length above cone of flashing.

Size	Product Code	Pack
3 ounce tube	JRTV	1

# Premium Rain Caps


## DELUXE RAIN CAP

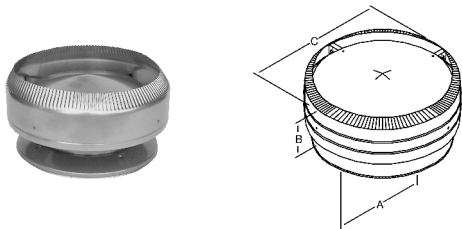

- Advanced design, premium quality stainless steel.
- Provides protection against the elements
- Twist-lock connection for secure installation.

Size	Dimensions			Product Code	Pack
	A	B	C		
5"	7"	7-1/8"	11-1/4"	SPR5DRC	1
6"	8"	7-1/4"	11-1/4"	SPR6DRC	1
7"	9"	7-1/2"	13-1/4"	SPR7DRC	1
8"	10"	7-5/8"	14-1/4"	SPR8DRC	1

## SPARK ARRESTOR




- Stainless steel mesh wire fits inside Rain Cap (JSC\*RC)

Size	Dimensions	Product Code	Pack
5"	4-1/2" x 26"	JSC5SPAR	10
6"	4-1/2" x 26"	JSC6SPAR	10
7"	4-1/2" x 29"	JSC7SPAR	10
8"	4-1/2" x 32"	JSC8SPAR	10

# Parts and Accessories


## UNIVERSAL WALL BAND

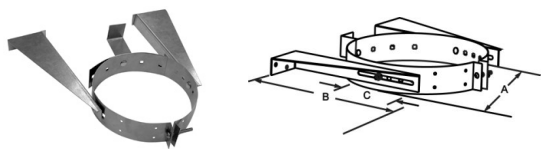

- Provides lateral support for the chimney when installed adjacent to a wall
- Provides more than 4" of horizontal adjustability to clear some overhangs and obstructions
- Required at 8 foot or closer intervals to stabilize the chimney, whenever it is supported along a vertical wall

Size	Dimensions			Product Code	Pack
	A	B	C		
6" to 8"	8" to 10"	17"	4"	0800700	10

## WALL BAND

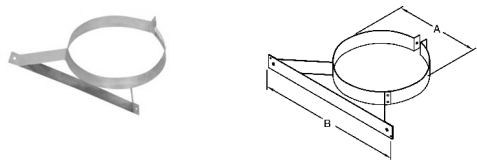

- Stainless steel construction.
- Provides lateral support for the chimney when installed adjacent to a wall.
- Maintains the mandatory 2" clearance to combustibles.
- Installed on first length above the Tee, then every 8 feet thereafter.

Size	Dimensions		Product Code	Pack
	A	B		
5"	7"	17"	JSC5WB	1
6"	8"	17"	JSC6WB	1
7"	9"	17"	JSC7WB	1
8"	10"	17"	JSC8WB	1


## UNIVERSAL TEE CAP RETAINER



- Tee Cap Retainer to secure tee cap on the bottom side of Insulated Tee.
- Adjusts to fit all chimney diameters specified below.

Size	Product Code	Pack
6" to 8"	2002530	1


## BLACK STOVE PIPE ADAPTER

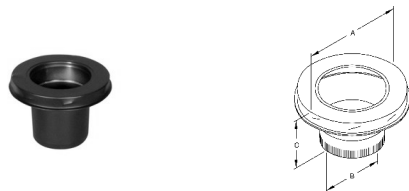

- For a quick and easy transition from black stove pipe to factory-built chimney.
- Twist-lock for easy connection.

Size	Dimensions			Product Code	Pack
	A	B	C		
5"	7"	5"	5-1/16"	JSC5ASE	1
6"	8"	6"	5-1/16"	JSC6ASE	1
7"	9"	7"	5-1/16"	JSC7ASE	1
8"	10"	8"	5-1/16"	JSC8ASE	1


## ADAPTER PLATE

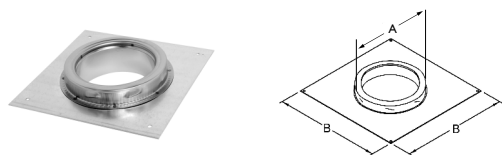

- To be used with masonry and factory built fireplaces.

Size	Dimensions		Product Code	Pack
	A	B		
5"	7"	11-5/8"	JSC5AP	1
6"	8"	11-5/8"	JSC6AP	1
7"	9"	11-5/8"	JSC7AP	1
8"	10"	11-5/8"	JSC8AP	1

## FINISHING PLATE

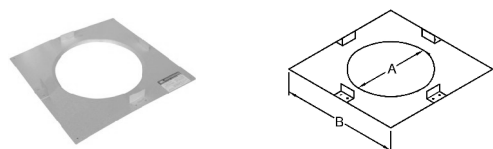

- Used where the chimney passes through a soffit to provide a finished appearance.
- Maintains the mandatory 2" clearance to combustibles.

Size	Dimensions		Product Code	Pack
	A	B		
5"	7-1/8"	13"	JSC5FP	1
6"	8-1/8"	14"	JSC6FP	1
7"	9-1/8"	15"	JSC7FP	1
8"	10-1/8"	16"	JSC8FP	1

## Parts and Accessories continued


### HD UNIVERSAL ROOF BRACE KIT



- Designed to provide extra stability for chimney system above roof line
- Required when the chimney extends 5 feet or more above the roof. Use one kit every 5 feet.
- Telescoping legs can adjust from 5' to 9'
- Support band adjusts to fit 6", 7", and 8" chimney

Size	Dimensions	Product Code	Pack
6" to 8"		0843900	1


### UNIVERSAL SNOW SPLITTER



- Designed to deflect snow and ice while preventing unnecessary strain or damage to chimney
- Mounts directly above chimney pipe with easy panel assembly
- Made from heavy gauge galvanized steel

Size	Product Code	Pack
5" to 8"	2001922	1

### JUSI-UNIVERSAL SHIELDING INSULATION

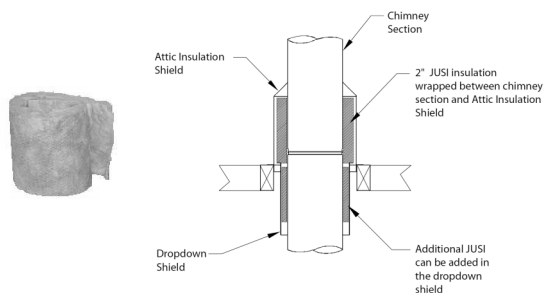

- Insulation for use with:
  - Attic Insulation Shield (JSC\*AIS)
  - Wall Thimble (SPR\*WTB)
  - Cathedral Ceiling Support (SPR\*CCSB)
- Stops cold air infiltration into the dwelling.
- Provides additional protection against heat from the chimney.

Size	Dimensions	Product Code	Pack
Universal	2" x 12" x 48"	JUSI	1

# Support Kits

## SuperPro has put together 3 chimney kits to get your project done . . .

SuperPro has taken the guess work out of chimney installation by putting the most common parts for each installation all in one box. These 3 kits depict the most common installations. Simply decide which of these scenarios fits your need, then pick up your chimney lengths, roof flashing and elbows (if required).

### CEILING SUPPORT KIT

When your chimney goes up through a flat ceiling, then thru the roof, you may choose the MODEL SPR DECORATOR CEILING SUPPORT INSTALLATION KIT - SPR\*DCSK


- Deluxe Rain Cap
- Attic Insulation Shield
- Decorator Ceiling Support
- Stove Pipe Adaptor

NOTE: For a two story application an additional Firestop Radiation Shield must be installed.

. . . Now you just need your roof flashing and chimney lengths.

**SIZE**  
5"  
6"  
7"  
8"

**PRODUCT CODE**  
SPR5DCSK  
SPR6DCSK  
SPR7DCSK  
SPR8DCSK

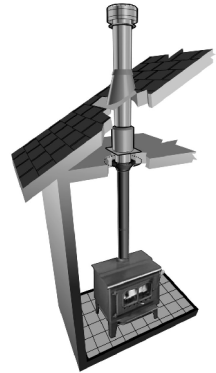

### Cathedral Ceiling Support Kit


When your chimney goes out a cathedral or open beam ceiling, you may choose the MODEL SPR CATHEDRAL CEILING SUPPORT INSTALLATION KIT - SPR\*CCSK

- Deluxe Rain Cap
- Cathedral Ceiling Support
- Draw Band
- Trim Kit
- Stove Pipe Adaptor

. . . Now you just need your roof flashing and chimney lengths

**SIZE**  
6"  
7"  
8"

**PRODUCT CODE**  
SPR6CCSK  
SPR7CCSK  
SPR8CCSK

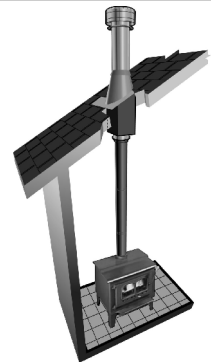

### Wall Support Kit

When your chimney goes out a wall and then runs straight up, you'll need the MODEL SPR WALL SUPPORT INSTALLATION KIT - SPR\*WSK


- Deluxe Rain Cap
- Wall Bands (2)
- Stove Pipe Adaptor
- Wall Thimble
- Stainless Steel Tee with Plug
- Adjustable Wall Support

. . . Now you just need:

- Vertical Chimney lengths
- Through the wall length (must extend at least 3" into the room)
- 12" chimney length or insulated tee plug (installed below the stainless steel tee)

**SIZE**  
5"  
6"  
7"  
8"

**PRODUCT CODE**  
SPR5WSK  
SPR6WSK  
SPR7WSK  
SPR8WSK



## NOTES


## NOTES




# Typical Installations

## DECORATOR CEILING SUPPORT INSTALLATIONS


### One Story

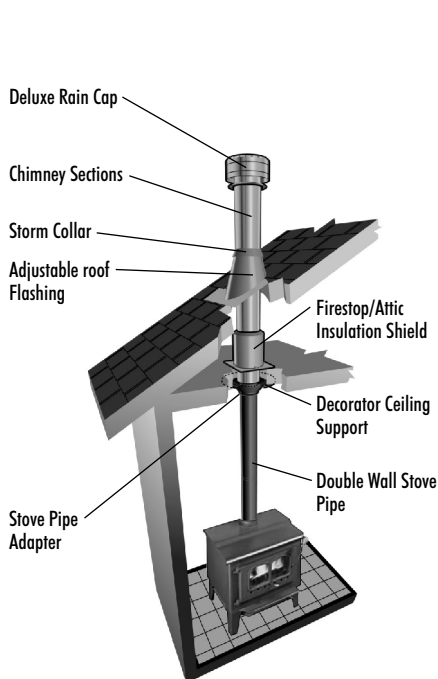

### Two Story

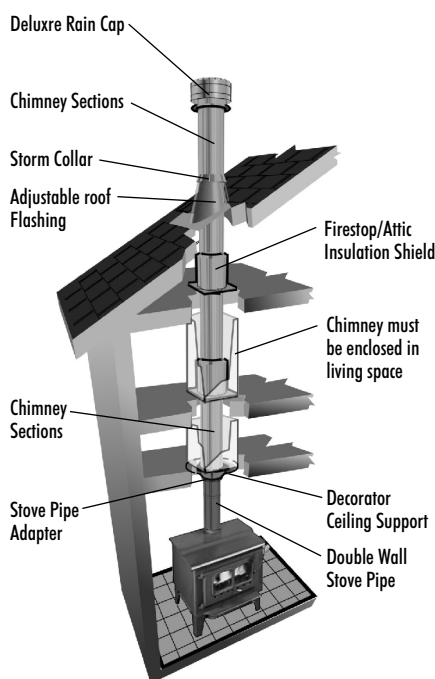


### Elbow Installation

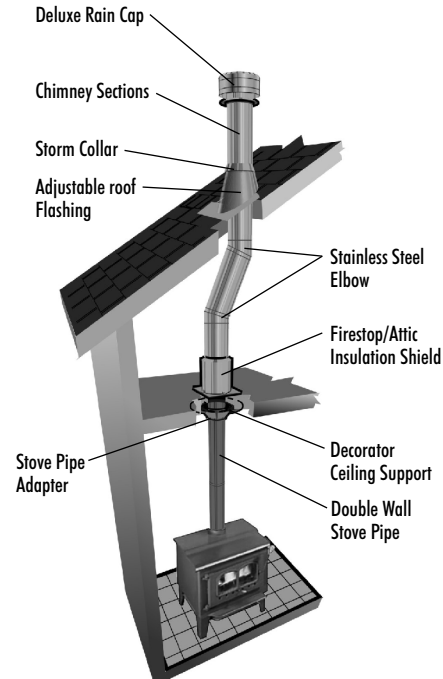


## WALL SUPPORT INSTALLATIONS

### One Story

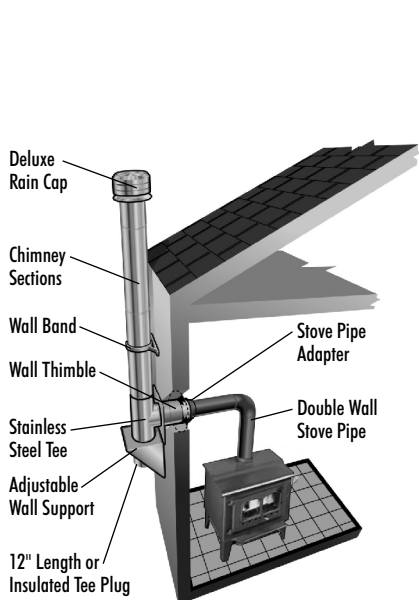


### Through a Soffit

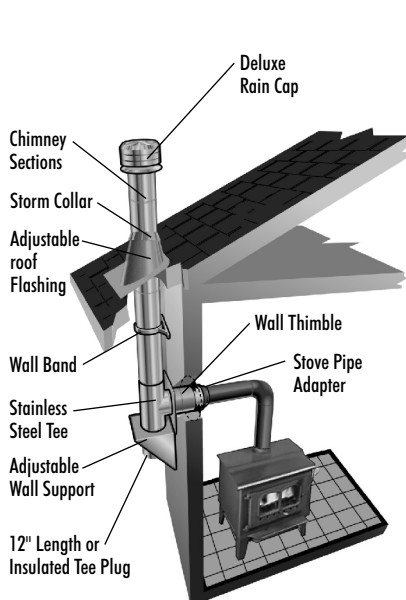

## CATHEDRAL SUPPORT INSTALLATION

### With Cathedral Ceiling Support Box

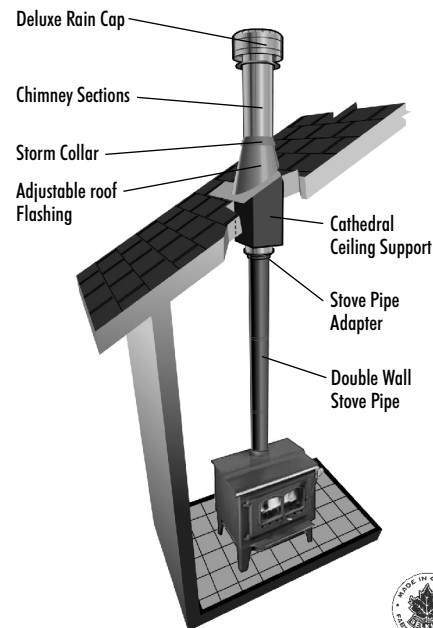

RESIDENTIAL AND COMMERCIAL: VENT | CHIMNEY | GRILLES | REGISTERS | DIFFUSERS

United States  
5030 Corporate Exchange Blvd.  
Grand Rapids, MI 49512

1.800.992.VENT (8368)  
info@selkirkcorp.com



selkirkcorp.com

2016 Selkirk is a registered trademark of Johnson Controls, Inc. in the United States and other countries.

Canada  
375 Green Road  
Stoney Creek, ON L8E 4A5

1.888.SELKIRK (735.5475)  
cscanada@selkirkcorp.com

SPR001-US-E R&B 3499 - 4645 10/2016